



Street Magic® BLACK MAGIC™ Remote Control

INSTALLATION GUIDE

This guide assumes user has properly installed the LED lighting products that are to be used in conjunction with this product. Please check with LED manufacturer for procedures and instructions for the proper installation of their LED products.

Make sure bike is *cool* and parked on *a flat secure surface, always wear appropriate safety equipment*

Next locate the battery and unhook *the battery negative (-) cable.*

********Safety Caution! *****
negative (-) battery cable must be unhooked first to avoid potential fire hazard!***

Locate positive wires from LEDs and join all wires together into one group. Next located all the negative wires from the LEDs and again join them together into one group.

Installation Must:

**All LEDs must ground through Black Magic control units
GREEN WIRE. Failure to do so will result in improper operation,
and or damage to Black Magic unit. You must not use any other ground location
for any of the LED ground connections.**

Wires for Black Magic™ control unit are as follows:

RED WIRE: Connects to Battery positive terminal or other positive 12 volt source with key in off position.

BLACK WIRE: To Battery negative terminal or other suitable ground connection.


WHITE WIRE: Power to LEDs positive wire group.

GREEN WIRE: Ground wire to **ALL LED GROUND WIRES.**

It is a must that all LEDS use only the Black Magic control box GREEN WIRE for their ground connection. Any LED that uses any other ground connection will remain on constantly, and will not be controlled by Black Magic™ control box. If after installation of Black Magic unit you have one or more LEDs that are on constantly you must locate those units ground wires and make sure they are only grounding through the GREEN WIRE from the Black Magic™ control box.



Street Magic® Black Magic™ Remote Control Block Diagram

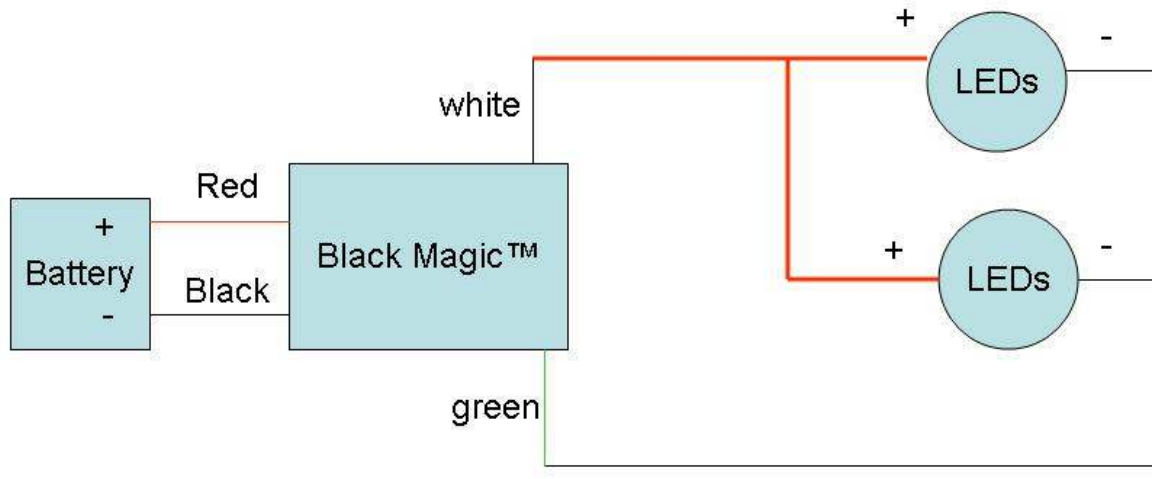

Custom Dynamics
1-800-382-1388
www.customdynamics.com